


REVISIONS			
REV	DESCRIPTION	DATE	APPR

SLICE MCP-07 to Pigtails With Quarter Bridge

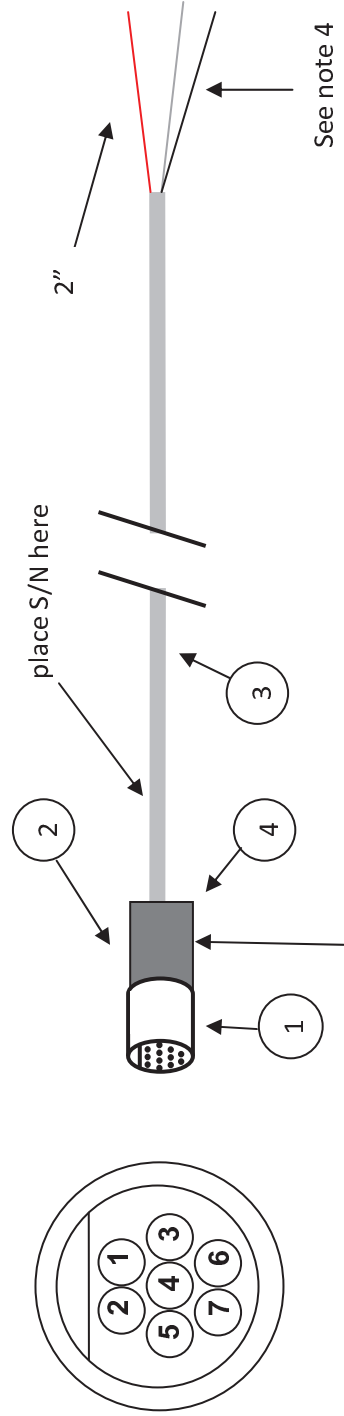

See note 4

**Omnetics
MCP-07
(rear view)**

See note 1

1	2	3	4	5	Function
(80000-04019) Omnetics MCP-07 pin number	(40361-350ZN*) Resistor 350Ω 1/8W 0.5% 50 PPM	(70003-00025) Cooner NIMUF 4/30- 4046SJ 90 inches wire color	(22005-00001) Dallas ID (Microcard) wire color		
1					+SIG
2		White			-SIG
3		Red			+EX
4			Blue		+ID
5		Black			-SIG
6			Black		-ID
7		Shield			SHIELD

Notes:

1. Use material and assembly instructions from 13000-30120 (includes back shell 89100-1381A).
2. Solder all wires so the insulation is as close as possible to the solder cups.
3. Use RMA or no-clean flux.
4. Strip and tin red, black and white wires 1/2". Cut short green wire and shield.
5. Include copy of this drawing in shipment to customer.



* These must be screened to obtain the 0.5% value.

Copyright © 1998-2010 Diversified Technical Systems, Inc. All rights reserved.

TITLE: SLICE MCP-07 to pigtails with quarter bridge			
PROJECT	DOCUMENT NUMBER	REV	SHEET SIZE
SLICE	13003-30122	---	
FILE NAME: SLICE MCP-07 to pigtails with quarter bridge.docx			
DATE CREATED	BY	LAST REVISED	BY
12 July 2010	JP/EK		JP