


INTELLECTUAL PROPERTY STATEMENT
 This drawing contains information that is the property of Diversified Technical Systems, Inc. (DTS). All copyright, patent, and ownership rights are retained. This information shall not be disclosed, reproduced in whole or in part, or used for manufacture without prior written consent from DTS.


RoHS
 Manufacture/fabricate to meet the EU RoHS Directive 2011/65/EU and RoHS Annex II phthalates

REV	ZONE	DESCRIPTION	DATE	BY
0		ORIGINAL RELEASE	2021-02-15	JC
1		UPDATED NOTES AND TORQUE SPEC	2021-04-27	JC

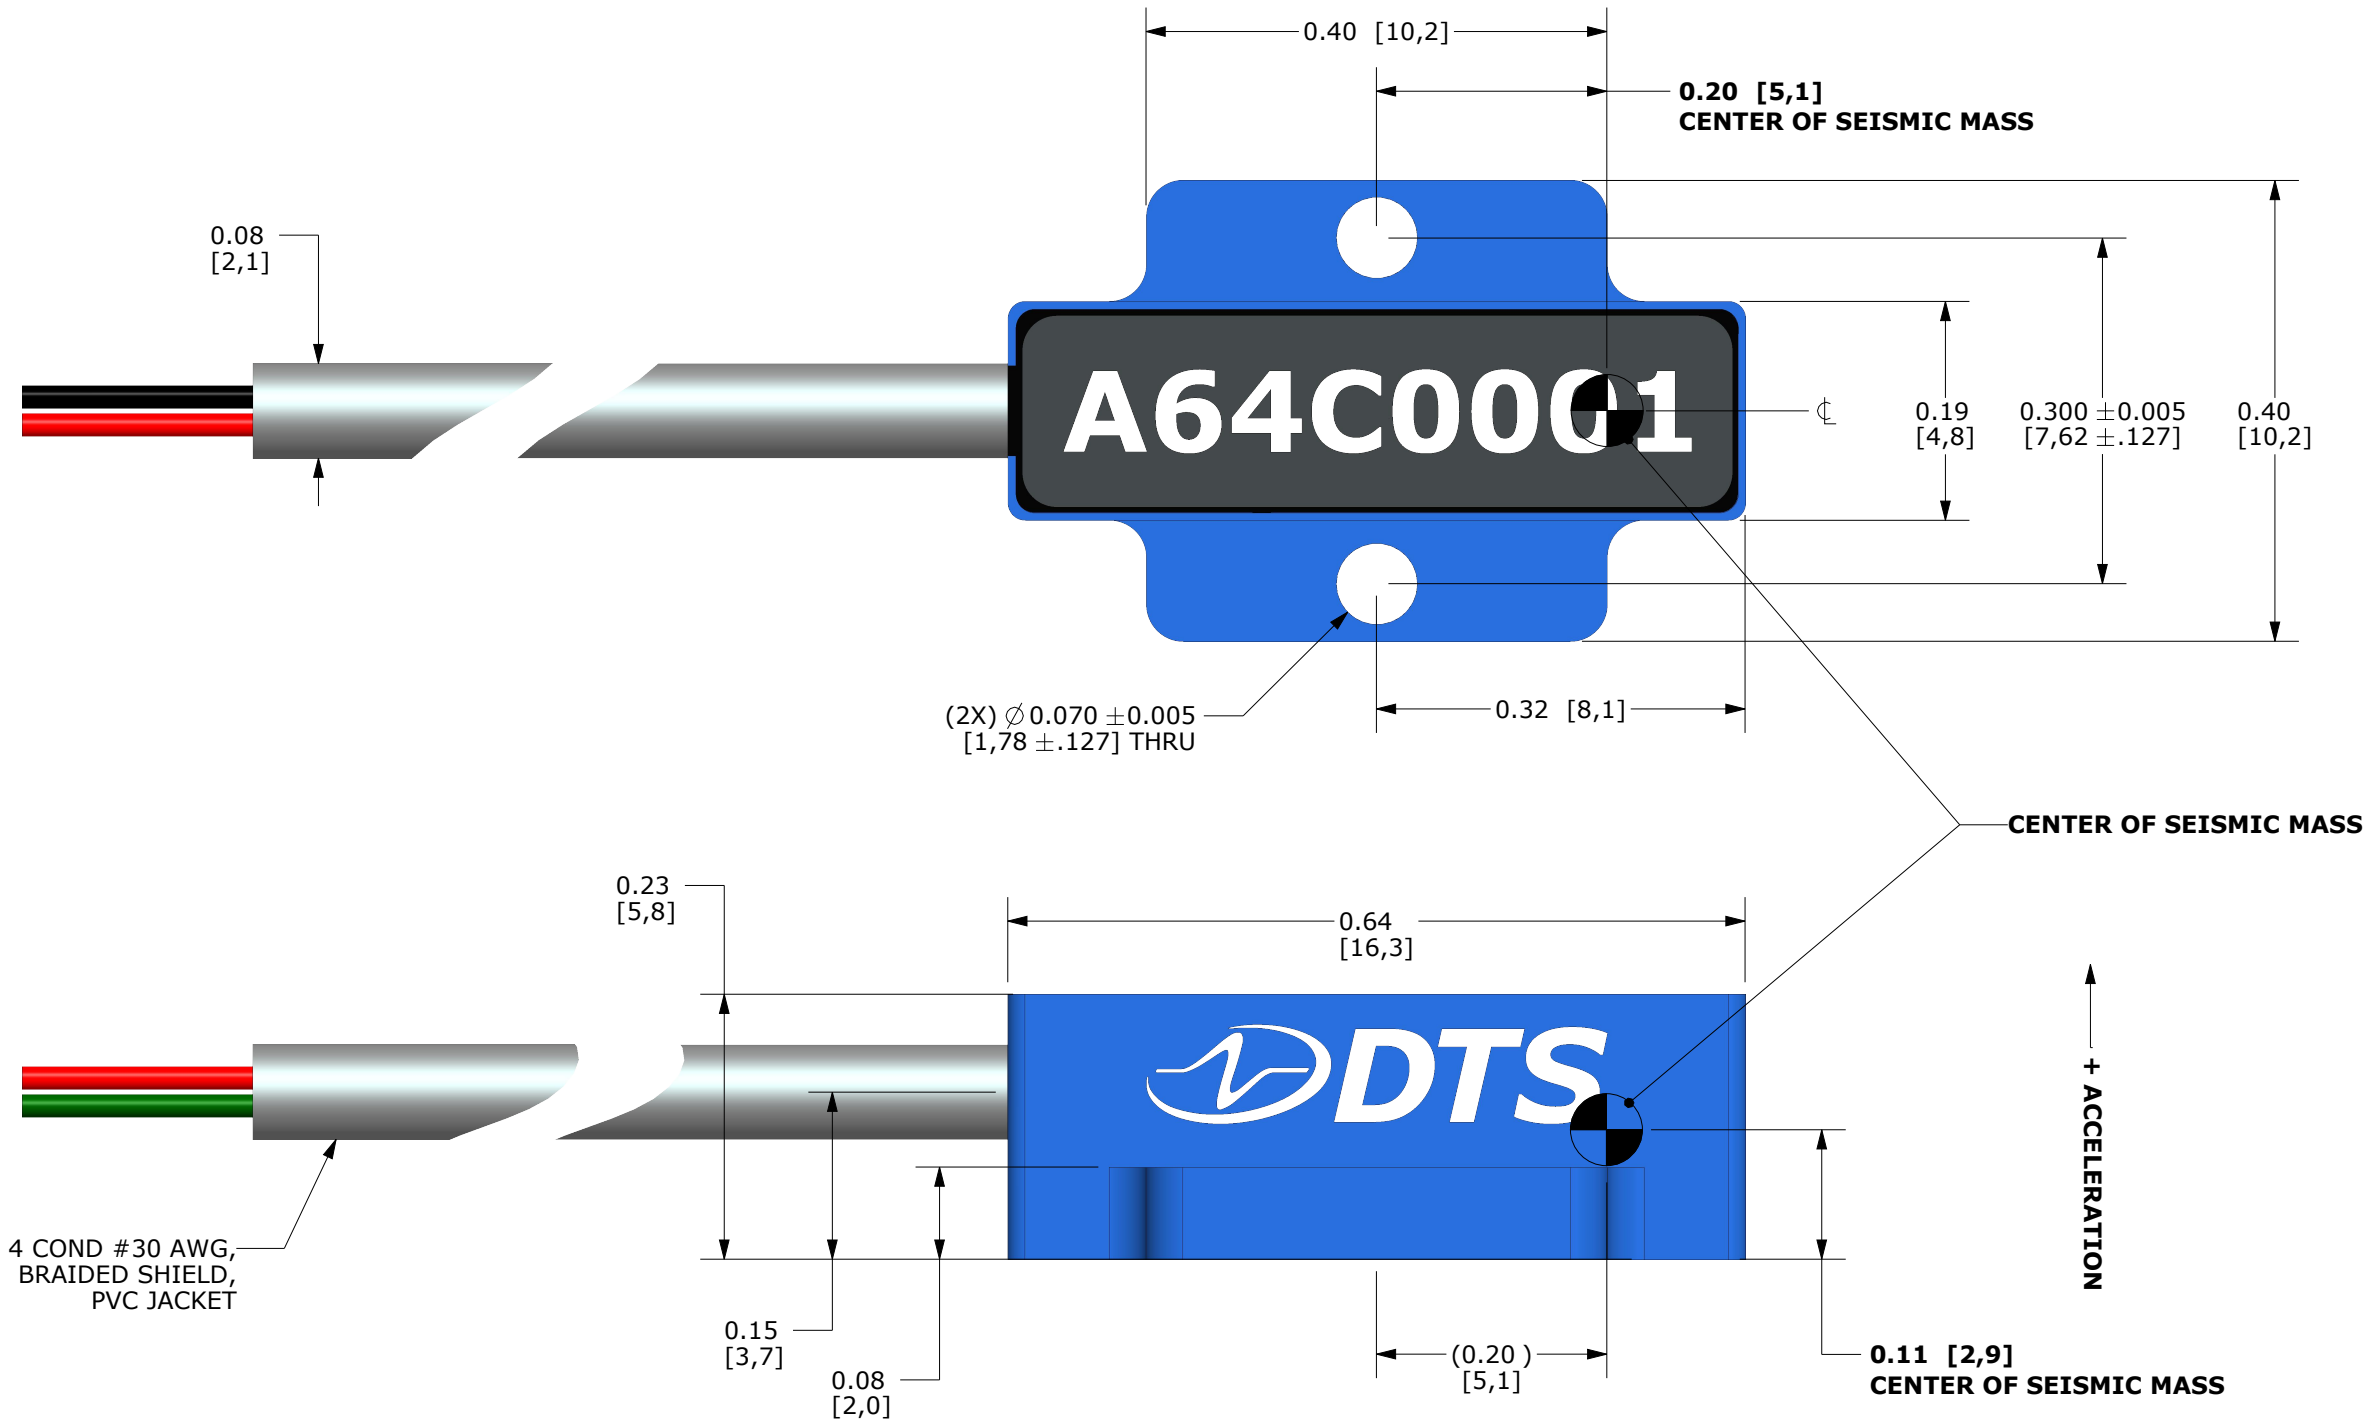

FUNCTION	COLOR
+EXCITATION	RED
-EXCITATION	BLACK
+SIGNAL	GREEN
-SIGNAL	WHITE
SHIELD	OUTER BRAID

- NOTES:**
- 1) MASS = 1.5 GRAMS. (CABLE WEIGHS 9 GRAMS PER METER)
 - 2) MOUNT USING 0-80 X 3/16" LONG SHCS.
 - 3) TORQUE MOUNTING SCREWS TO 1.2 IN-LB [0.136 NM] CLEAN AND DRY.
 - 4) MOUNTING SURFACE TO BE FLAT AND CLEAN.
 - 5) ALWAYS CONNECT THE CABLE SHIELD TO AN APPROPRIATE GROUND OR SHIELD PIN ON THE DAS.

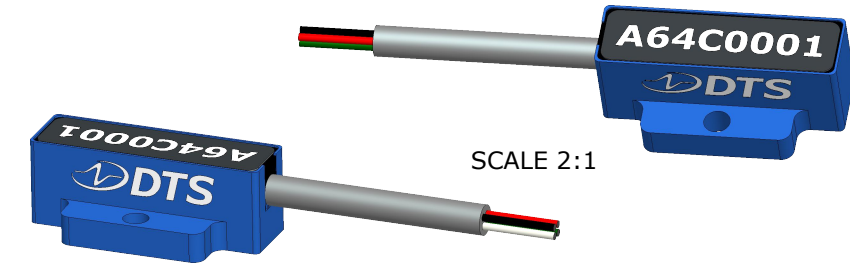

SEAL BEACH, CA 90740 562-493-0158 www.dtsweb.com	DESCRIPTION: A64C ACCEL, 500G, MOUNTING DRAWING	
	MATERIAL: 6061-T6 ALUMINUM W/ BLUE ANODIZE	DTS P/N: 14000-00000
UNLESS OTHERWISE SPECIFIED: UNITS = MM [INCH] DIMENSIONAL TOLERANCES ±.254 [0.010"] INTERPRET PER ASME Y14.5. DO NOT SCALE.	DRAWN: J CASEY	DATE: 2021-02-15
	SIZE: B	SCALE: 6:1
		SHEET: 1 OF 1