


Cable, power, Amp (4-socket) to LEMO (4-pin) (50 cm)

P/N 10600-00250

REVISIONS			
REV	DESCRIPTION	DATE	APPR

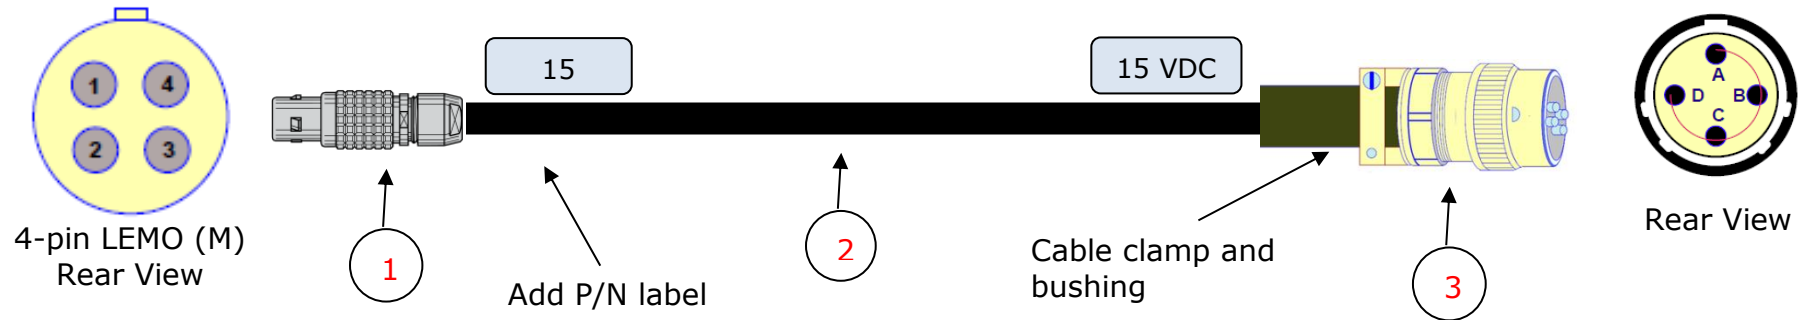

- Notes:**
1. Solder all wires so the insulation is as close as possible to the solder cups.
 2. Use RMA or no-clean flux.
 3. Use 1/4" length of 3/64" diameter shrink-tube on LEMO pins.
 4. Use 1/4" length of 1/8" diameter shrink-tube on MS3476 pins.
 5. Cut short the unused wires.
 6. Label cable ends correctly.

1	2	3	---
LEMO FGG.2B.304.CLAD82 (80000-02085) pin number	Belden 8454 (70002-00012) wire color 50 cm	MS3476L14-4S (80000-03040) pin number	Function
1	Red	A	+15 V
2	Black	C	Return
N/C	Brown	N/C	---
N/C	White	N/C	---

DTS
www.dtsweb.com

Copyright © 1998-2015 Diversified Technical Systems, Inc. All rights reserved.

TITLE: Cable, power, Amp (4-socket) to LEMO (4-pin)

PROJECT	DOCUMENT NUMBER	REV	SHEET	SIZE
TDAS	10600-00250-ASY	0		

FILE NAME: 10600-00250-ASY.docx

DATE CREATED	BY	LAST REVISED	BY	APPROVED
2 June 2015	JP			JP