


Mini Distributor to Dummy Exit Cable

TDAS-C-DDX (Doc. No. 10703-00050)

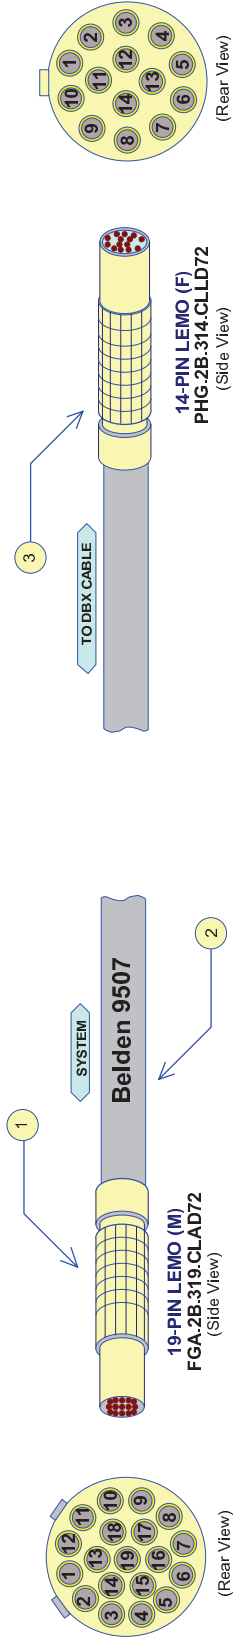

1	2	3	4	5
Lemo FGA.2B.319.CLAD72 pin number	Belden 9507 (2 meters) Wire Color	Lemo PHG.2B.314.CLLD72 pin number	Function	Notes
1	Black (Blue)	12	PWR ON (short to GND = ON)	
10	Blue	11	Arm Status In (RS232 Level, +V = Armed)	
3	Drain Wire	N/C	Shield	
4	Black (Yellow)	14	Start Record Output +	
7	Yellow	13	Status Input	
8	Black (Red)	1	Main Power +, (15V)	
9	Red	2	Main Power +, (15V)	
17	Black (Brown)	4	Main Power -, (GND)	
18	Brown	8	Main Power -, (GND)	
11	Black (Orange)	3	Ethernet Rx-	
12	Orange	7	Ethernet Rx+	
13	Black (Green)	6	Ethernet Tx-	
14	Green	5	Ethernet Tx+	
15	White	9	Event+	
19	Black (White)	10	Event-	

Notes:

- Solder all wires so the insulation is as close as possible to the connector cups.
- Use RMA or no-clean flux.
- Use 1/4" length of 3/64" diameter shrinktube on all pins.
- Cut short the unused wires.
- Label cable ends correctly.

Call DTS if you have any questions. (562)483-0156



Copyright © 1998-1999 Diversified Technical Systems, Inc. All rights reserved.

TITLE
Mini Distributor to Dummy Exit Cable

PROJECT	DOCUMENT NUMBER	REV	SHEET	SIZE
TDAS	TDAS-C-DDX	2	01 OF 01	B

FILE NAME

DATE CREATED	BY	LAST REVISION	BY	APPROVED
13-Sep-2005	KT	13-Dec-2006	JP	JP