



Control Cable

TDAS-C-RDC (Doc. No. 10700-00144-ASY)



19-pin LEMO (M)
rear view

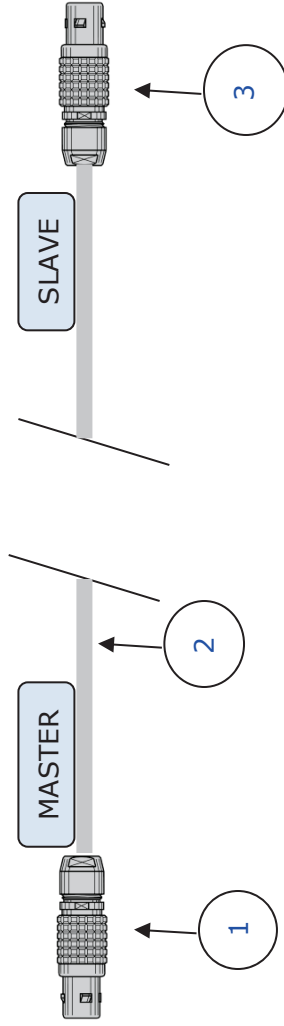

- Notes:**
1. Solder all wires so the insulation is as close as possible to the solder cups.
 2. Use RMA or no-clean flux.
 3. Use 1/4" length of 3/64" diameter shrinktube on all pins.
 4. Cut short the unused wires.
 5. Label cable ends correctly.

1	LEMO FGG.2B.319.CLAD82 pin number	2	5 m Belden 9507 wire color	3	LEMO FGG.2B.319.CLAD82 pin number	-	Function (Slave)
1	RS232 Rx	Black (Blue)	1	RS232 Rx			
3	Shield	Drain Wire	3	Shield			
4	Start Record	Red	4	Start Record			
5	Status Common	Black (Red)	16	Status Common			
6	Status Out	Yellow	7	Status In			
7	Status In	Brown	6	Status Out			
11	Ethernet Rx -	Black (Orange)	8	Ethernet Tx -			
12	Ethernet Rx +	Orange	9	Ethernet Tx +			
13	Ethernet Tx -	Black (Green)	17	Ethernet Rx -			
14	Ethernet Tx +	Green	18	Ethernet Rx +			
15	Event +	White	15	Event +			
16	Status Common	Black (Yellow)	5	Status Common			
19	Event -	Black (White)	19	Event -			



Copyright © 1998-2009 Diversified Technical Systems, Inc. All rights reserved.

TITLE: Control Cable			
PROJECT	DOCUMENT NUMBER	REV	SHEET SIZE
TDAS	10700-00144-ASY	0	
FILE NAME: 10700-00144-ASY.docx			
DATE CREATED	BY	LAST REVISED	APPROVED
9 Nov 2012	EK		JP

REVISIONS		DATE	APPR
REV	DESCRIPTION		