
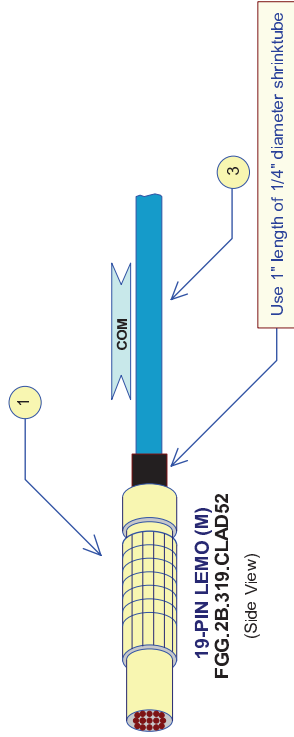


COMMUNICATIONS/CONTROL CABLE - ETHERNET - PC

TDAS-C-REC (Doc. No. 10703-00150)

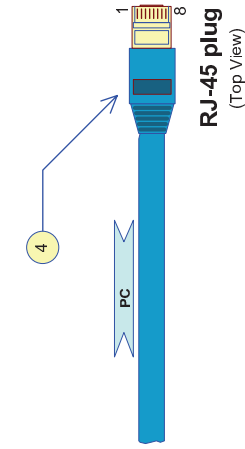

Notes:

1. Solder all wires so the insulation is as close as possible to the connector cups.
2. Use RMA or no-clean flux.
3. Use 1/4" length of 3/64" diameter shrinktube on all Lemo pins.
4. Cut short the unused wires. Label cable ends.

Call DTS if you have any question. (662) 493-0158

1	2	3	4	5	6
Lemo 19 pin FGG.2B.319.CLAD52	Function	L-Com TRD855BL-50 (Cut To 6 meters)	RJ-45 plug	Function	Notes
pin 18	Rx+	White-Orange	pin 1	Tx+	
pin 17	Rx-	Orange	pin 2	Tx-	
pin 9	Tx+	White-Green	pin 3	Rx+	
N/C		Blue	pin 4		
N/C		White-Blue	pin 5		
pin 8	Tx-	Green	pin 6	Rx-	
N/C		White-Brown	pin 7		
N/C		Brown	pin 8		



www.dtsweb.com

Copyright © 1998-2006 Diversified Technical Systems, Inc. All rights reserved.

TITLE Cable Diagram

PROJECT TDAS3-C-RC-ETH-PC - 0781

DOCUMENT NUMBER REV SHEET SIZE

TDAS3 01 01 OF 01 B

FILE NAME

Ethernet Crossover Communication Cable

DATE CREATED BY **LAST REVISED** BY **APPROVED**

23-Oct-2002 KT 14-Apr-2006 KT APPROVED J.P.