
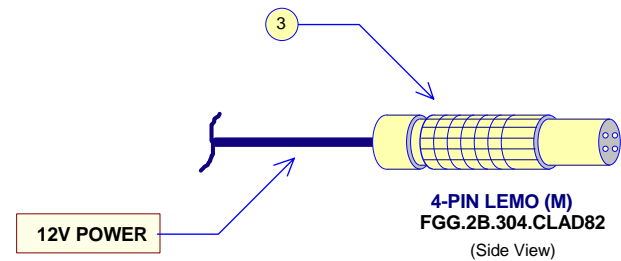
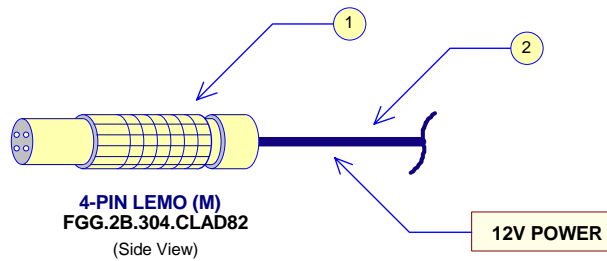


Power cable; grounded, long TDAS-C-PPL (Doc. No. 10600-0011x-ASY)



1	2	3
LEMO 4-pin FGG.2B.304.CLAD82	Belden 19124 (16/3) (see routing for length)	LEMO 4-pin FGG.2B.304.CLAD82
1	White	1
2	Black	2
3 and 4	Green	3 and 4

Notes:

1. Solder all wires so the insulation is as close as possible to the connector cups.
2. Use RMA or no-clean flux.

Call DTS if you have any question. (562) 493-0158



Copyright © 1998-2016 Diversified Technical Systems, Inc. All rights reserved.

TITLE PPL Power Cable

PROJECT	DOCUMENT NUMBER	REV	SHEET	SIZE
TDAS3	10600-0011x-ASY	0	01 of 01	B

FILE NAME				
10600-0011x-ASY.pdf				
DATE CREATED	BY	LAST REVISED	BY	APPROVED
11-Apr-2016	EK	---	---	EK