



SLICE Distributor SYS Pigtails

13000-30451



Omnetics 16-pin (male)
A18460-001
(Rear View)

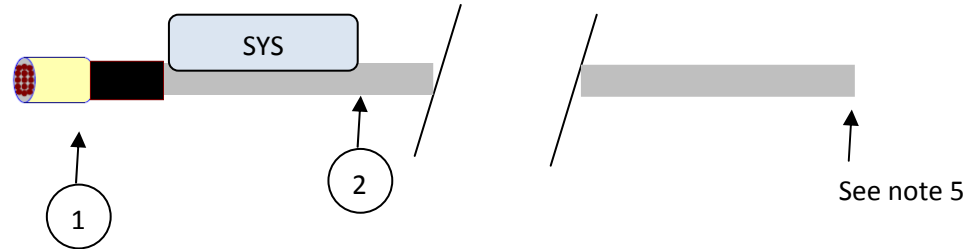

REVISIONS			
REV	DESCRIPTION	DATE	APPR
0	New release	14 January 2011	JP

1	-	2
Omnetics A18460-001 (80000-14022) pin number	Function	Mogami 2862 (70005-00004) 5 meters Wire color
1	/ON	Yellow ()
2	Event -	Orange ()
3	Event +	White ()
4	Status Out	Yellow (-)
5	On Status	White (-)
6	Ground	Shield Braid
7	Ground	Shield Braid
9	Start Record	Orange (-)
10	+15V	Pink ()
11	Ground	Shield Braid
12	Ethernet Tx +	Orange (- -)
13	Ethernet Rx +	Pink (-)
14	+15V	Pink (- -)
15	Ethernet Tx -	Yellow (- -)
16	Ethernet Rx -	White (- -)

Notes:

1. Solder all wires so the insulation is as close as possible to the solder cups.
2. Use RMA or no-clean flux.
3. Twist 6 strands of shield braid together and cover with 3/64" shrink tube. (3 places)
4. Label cable next to connector.
5. Strip and tin wires to allow for testing.



Copyright © 1998-2011 Diversified Technical Systems, Inc. All rights reserved.

TITLE: SLICE Distributor SYS Pigtails				
PROJECT	DOCUMENT NUMBER	REV	SHEET	SIZE
TDAS	13000-30451-ASY	0		
FILE NAME: 13000-30451-ASY.docx				
DATE CREATED	BY	LAST REVISED	BY	APPROVED
14 Jan. 2011	JP			JP